



# **Waste to Worth: A Review on Utilization of Vegetable Waste**

**Preeti Yadav<sup>a</sup>, S. K. Dhankhar<sup>a</sup> and Ram Mehar<sup>a\*</sup>**

<sup>a</sup> *Department of Vegetable Science, CCS Haryana Agricultural University, Hisar-125004 (Haryana), India.*

## **Authors' contributions**

*This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.*

## **Article Information**

DOI: 10.9734/IJECC/2023/v13i92368

## **Open Peer Review History:**

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/102821>

**Review Article**

**Received: 03/06/2023**

**Accepted: 07/07/2023**

**Published: 18/07/2023**

## **ABSTRACT**

India is the world's second greatest producer of vegetables after China, however over 30% of the fruits and vegetables grown in the country are wasted. Vegetable wastes include rotten vegetables, peels, shells, scraped portions of vegetables and inedible parts discarded during collection, handling, transportation and processing. Lack of knowledge and awareness among farmers, poor infrastructure, faulty harvesting, unsuitable transport and storage facilities are major causes of loss. 5 R system of waste management including refuse, reduce, recycle, reuse and recover is an effective way of managing vegetable waste. Non-toxic, biodegradable waste of vegetables can be transformed into various valuable output products like biogas, power alcohol, biofuel, compost and vermicompost. Livestock is currently one of the agricultural subsectors in emerging countries that is expanding at the fastest rate. According to recent research, co-products from the processing of fruits and vegetables can be effectively utilized as functional feed components in farm animals' diets. Vegetable wastes are rich in vitamins and minerals and are suitable raw materials to produce high-value chemicals or metabolites such as phenolic compounds, terpenes, fatty acids, dietary fiber, saponins, pigments, food additives and phytoestrogens Bio-plastic are manufactured from renewable biomass sources such as maize starch, potato starch, cassava starch, vegetable oil and have biodegradable qualities. The utilization of fruit and vegetable waste as a carbon source is an

\*Corresponding author: E-mail: [rammeharsandhu1111@gmail.com](mailto:rammeharsandhu1111@gmail.com);

interesting alternative to reduce the production costs of microbial exopolysaccharides like xanthan and pullulan which has use in the pharmaceutical, medical, cosmetic and confectionary industries.

**Keywords:** Vegetable waste; valuable output; 5R system; animal nutrition and bioplastic.

## 1. INTRODUCTION

With a wide variety of climatic and geographic conditions, India is the second-largest producer of vegetables in the world (199 million metric tonnes) [1]. Most of that wastage comes from fruits and vegetables. Almost 30% of the fruits and vegetables grown in India are wasted [2]. Vegetable waste is a biodegradable material that is produced in vast amounts. A large portion of it is thrown on land to decay in the open, generating a nasty smell and attracting birds, rodents, and pigs that can spread illness. Vegetable waste is a biodegradable material that is produced in vast amounts. A large portion of it is thrown on land to decay in the open, generating a nasty smell and attracting birds, rodents, and pigs that can spread illness. Vegetable waste includes inedible components of vegetables such as peels, shells, scraped pieces and vegetables that rot and are wasted during collection, handling, transportation and processing [3]. These wastes are currently disposed of on the outskirts of cities. However, this is not a good solution for FVW due to its high-water content, which causes microbiological instability, off-odour development, and leachate [4,5]. The significant loss of fruits and vegetables is due to poor agricultural practices and a lack of regulation in the food processing sector. In order to achieve sustainability vegetable waste management by proper utilization is mandatory. Environmental pollution can be minimized by handling discarded goods properly. The high biodegradability and low toxicity of vegetable waste make them suitable for recycling. Technologies with effective low input costs are created to transform organic waste into useful goods for a sustainable environment. In addition to protecting biodiversity, natural resources, and human life, effective waste management will also have a positive economic impact by creating more work opportunities. In this review, an attempt has been made to explore and cite the various products of vegetable waste management.

## 2. PROPERTIES OF VEGETABLE WASTE [6]

Vegetable waste is different from other solid waste as it is available in cheap and available in

bulk. It has defined colour & texture and Good Water binding capacity which can help in easy identification, separation and degradation. Also, it is moderate in taste & odour and contains bioactive compounds, vitamins and dietary fibers which make it suitable for reuse and compatible to processing. Also, vegetable waste is highly concentrated and easy to handle.

## 3. CAUSES OF WASTE

According to FAO estimates, the pre-consumer period is very important in terms of FVW formation [7]. According to Segre and Falasconi [8], up to 87% of fruit, vegetables, and cereals are thrown before reaching the customer in Italy. The causes of waste vary from country to country. One well-known reason for vegetable waste is the lack of technical, equipment knowledge and market information among farmers. Some farmers follow inappropriate cultural operations during the raising of crops and practice faulty harvesting of crops *i.e.*, harvesting at the inappropriate stage through unsuitable tools and improper methods which is the major cause behind the wastage of produce. Also, Post-harvest operations have a direct effect on the shelf-life and freshness of produce. Poor handling of produce after harvesting; inappropriate storage facilities, and unavailability of cold storage can cause deterioration in product quality Lack of adequate transport facilities and open transport vehicles can add to the deterioration of quality and ultimately the loss. In developing countries, processing facilities are not adequate and demand is seasonal which leads to a glut in the market. As vegetables have a short shelf life, most of the products get wasted during the glut period. An inefficient marketing system *i.e.*, fragmented marketing channels and involvement of many intermediaries and carelessness by them is one of the potential causes of waste.

## 4. STEPS FOR WASTE MANAGEMENT [9]

Waste segregation is a significant problem in waste processing and management. Unfortunately, no city in India can claim 100% waste segregation at dwelling units, and on average, only 70% of the trash collection is

observed, with the other 30% being mixed up and lost in the urban environment. 5 R system of waste management including refuse, reduce, recycle, reuse and recover is an effective way of managing vegetable waste. Steps of waste management are cited below:-

#### **4.1 Preventing and/or Reducing the generation of Waste at Source**

The waste generation should be prevented as much as possible. If prevention of any type of waste is not possible then the quantity of waste generated should be kept minimum.

#### **4.2 Improving the Quality of the Waste Generated**

The quality of waste generated should be improved by adopting various appropriate waste treatment or disposal strategies.

#### **4.3 Encouraging Reuse, Recycle and Recovery**

- ❖ Reuse is finding a new purpose for undesirable goods that would otherwise be discarded. It includes animal feeding. Leftover vegetables, peels and rotten vegetables can be reused for animal feeding [10].
- ❖ Recycle is the process of converting waste material into new goods in order to minimize the use of more virgin resources. Composting is a typical example of recycling [11].
- ❖ Recovery is using waste materials as input material to generate energy or create valuable new output products. Biofuel production comes under this aspect of waste management [12].

### **5. UTILIZATION OF VEGETABLE WASTE**

The term "food by-products" is becoming more popular. This concept denotes that biomass and garbage can be processed appropriately and transformed into useful marketable products [13]. There are various ways of utilization of vegetable waste. It can be directly used to feed animals or can be transformed into various other valuable products like compost, vermicompost, biogas, biofuel, etc. Various bioactive compounds including phenolic compounds, essential oil, dietary fibers, metabolites, nutraceutical products and enzymes can be extracted from it. Exopolysaccharides and bioplastics are other transformational products of this waste. So, it

must not be wasted and should be converted into various products of economic value. Various economic products of vegetable waste are discussed below.

#### **5.1 Animal Feeding**

Vegetable production, packing, distribution, and consumption produce a significant amount of waste, which is often disposed of by composting or dumping into landfills or rivers, polluting the environment. Due to the enrichment of useful substances including polyphenols, carotenoids, and dietary fiber, such resources can serve as a good supply of nutrients. In addition to turning waste into silage, this has the potential to be employed in the manufacturing of animal feeds, particularly for cattle and dairy cows [14]. However, there are significant limitations to this reuse strategy as well. These wastes are susceptible to microbial contamination due to their high-water content, which frequently exceeds 80%. As a result, some drying is frequently required. Furthermore, low protein content and a significant presence of indigestible chemicals may not always make a product acceptable for animal feed [15]. Furthermore, the content of vegetable items fluctuates by season, necessitating manufacturers to often adjust feed compositions.

In most developing nations, feed supplies are already very limited. India has a shortage of 25, 159 and 117 million tonnes of concentrates, green forages and crop residues respectively. Thus, constituting 32% concentrates, 20 % green forages and 25 percent crop residues shortage of the estimated requirement [16].

Pulp residue left after extraction of juice from bottle gourd is sundried and ground to feed to animals as it contains 24.3% protein. Grade-out carrots are used to feed rabbit and horse diet as it contains 10% CP and 60% sugar. Cabbage leaves and waste is used to feed poultry as a nitrogenous and high-caloric diet which increases egg production. Feeding goats with 12.5% tomato waste could replace 35% cereal-based concentrate in their diet and improve milk quality [17].

#### **5.2 Biofuel**

It is a type of fuel derived from biomass sources having a low carbon footprint and is documented as a significant component of a sustainable energy system. It includes bio-hydrogen, biogas, bioethanol and biobutanol. Bi-hydrogen is

produced through fermentation by anaerobic microorganisms such as clostridium either in the presence (photo fermentation) or absence of light (non-phototrophic). Many parameters affect its productions which include the kind of microorganism involved, metabolic pathways followed, the substrates used as inoculum and feedstock, the presence of inhibitors, and process conditions such as pH, temperature, and nutrient availability. Due to their abundance, high cellulose and starch content, and non-competitiveness with our food chain, monosaccharides produced from the hydrolysis of polysaccharides found in vegetable waste are the optimal substrates.

Pumpkin waste yielded 55 mL H<sub>2</sub>/g-VS [18].

It has been reported that utilizing carrot waste as a substrate, 71 mL H<sub>2</sub>/g-VS and 38 mL H<sub>2</sub>/g-using FVW made of cabbage, celery, and cauliflower have both been achieved [19].

Alkyl esters with large levels of fatty acids and less aliphatic alcohol make up biodiesel. The best biomass to use for making biodiesel is one with a high lipid content. Fresh or used vegetable oil waste, animal fats, and oilseed plants are all effective and potent substrates for the synthesis of biodiesel.

### 5.3 Biogas

It is one of the most valuable outcomes of anaerobic digestion of organic waste. India has the second-largest biogas program in the world. Biogas is a mixture of Methane (60%), Carbon dioxide (20-30%), Hydrogen (5-10%) and Hydrogen Sulphide (Trace), Nitrogen (1-2%), Water vapor (0.3%). Biogas can be used to different purposes, including heat, electricity, production of compressed or liquefied natural gas, while the AD digestate, rich in nitrogen, can be used as a fertilizer [21]. Methane fermentation is a complex process. The general process of anaerobic digestion is a series of processes like enzymatic hydrolysis, acidogenesis, acetogenesis and methanogenesis [22] and each metabolic stage is assisted by a series of microorganisms. Amongst the four stages, hydrolysis is the rate-limiting stage for FVW [23]. Methane production from waste depends on substrate composition. Among vegetables cabbage and carrot peels give the highest methane yield *i.e.*, 250-310 ml Methane/kg of vegetable waste [24]. According to a report

published on 10<sup>th</sup> Jan 2021 in the Times of India, a biogas plant was set up with the assistance of the Indian Institute of Chemical Technology to utilize vegetable waste from the Bowenpally market of Tamil Nadu. It generated 500 units of electricity daily and cut down electricity bills by 50%.

Since the methane content in the upgraded biogas must typically be over 95%, biogas upgrading to biomethane is one of the most widely used technologies for biogas exploitation today because it offers the chance to obtain a valuable biofuel that can be used directly as vehicle fuel in compressed natural gas (CNG) engines. Technologies for membrane separation, water or amine scrubbing (absorption procedures), and pressure swing adsorption (PSA) are employed. Additionally, the creation of syngas from the reforming of biogas has drawn interest since it may be utilized as a raw material to create chemicals and synthetic fuels [25].

### 5.4 Briquetting

It is a process for turning solid vegetable waste into high-density briquettes that increases the volumetric calorific value while also allowing for flexible storage and transportation. Vegetable waste is thermochemically transformed into affordable, environmentally friendly biofuel. Waste biomass can be directly compacted, ground and mixed with a binder, or brought to a specified moisture content before converted to briquettes. Without employing an external binder, Srivastava *et al* manufactured and assessed briquettes using four different types of VMW. According to the findings, the price of briquettes, including the price of raw materials, varied between \$24.68 and \$28.90 per tonne. The study concluded that the briquetting of VMW may be a viable option for generating useful energy instead of being allowed to rot and cause environmental concerns because the cost is equivalent to the cost of wood that is available at the market rate [26].

- 1) Collection of vegetable waste
- 2) Segregation of waste into different grades based on composition and size
- 3) Drying of waste material to appropriate moisture content
- 4) Size reduction
- 5) Briquetting (Formation of briquettes/ blocks using briquette press)

## 5.5 Power Alcohol

Despite the world's energy supply inevitably depleting, there is a growing global interest in alternative energy sources [28]. In recent years, increased research and development efforts have been concentrated on the commercial production of ethanol as the most promising renewable biofuel. Power alcohol is the mixture of ethyl alcohol and petrol in the ratio of 20:80 + a small quantity of Benzene. Ethyl alcohol is the main component of Power alcohol and its main advantage is that it can also be prepared from agricultural waste. Power Alcohol has high octane number which possesses better antiknock properties and the ability to burn completely. Therefore, many countries have initiated, or are in the midst of implementing programs that allow ethanol to be added to petrol. Fuel ethanol production has expanded dramatically as a result of the global need to cut oil imports, helping to enhance rural economies and improve air quality. The world ethyl alcohol production has reached approximately 27.34 billion gallons in 2022, whereas the USA and Brazil are the main producers i.e., 82 % of total production. The raw materials used for the manufacture of the power alcohol or ethyl alcohol are saccharine materials (such as sugarcane, and molasses), starchy materials (potatoes, cereal grain, etc.) and cellulose materials. While potato consumption has declined, processed items such as French fries, chips, and puree have grown in popularity. Potato peeling losses range from 15% to 40%, depending on the process used, i.e. steam, abrasion, or lye peeling. The PPW has enough starch, cellulose, hemicellulose, lignin, and fermentable sugars to be used as an ethanol feedstock. Although starch is a high-yielding feedstock for ethanol production, hydrolysis is necessary to make ethanol through fermentation. Previously, acids were used to hydrolyze starch, but due to the specificity of the enzymes, their inherent mild reaction conditions, and the absence of side reactions, amylases are now widely used as catalysts in this process. Starch processing is a method that uses enzymatic liquefaction and saccharification to produce a relatively clean glucose stream that is digested to ethanol by *Saccharomyces* yeasts. Enzymes have several advantages over acidic hydrolysis since they act under mild circumstances, are biodegradable, improve yields, and reduce energy, water consumption, and by-products [29]. The technique for using enzymes to produce bio-ethanol from starch consists of two stages: liquefaction and saccharification. In

liquefaction, -amylase, which is derived from thermo-resistant bacteria such as *Bacillus licheniformis* or modified strains of *Escherichia coli* or *i*, is used to reduce slurry viscosity or create dextrans. Enzymes in saccharification employ dextrans to produce glucose [30].

### 5.5.1 The procedure of making ethyl alcohol from vegetable peelings (potato)

- i. The potato skins are removed.
- ii. The potato peels are carefully washed, dried outside in the sun, then processed in a food processor. The obtained powder was kept in airtight containers.
- iii. The powder is mixed with distilled water and cooked in an autoclave for a while.
- iv. The mixture is well mixed in the stirrer.
- v. With the addition of the yeast, the substance undergoes additional fermentation.
- vi. Following fermentation, distillation was done at a temperature of about 70 degrees Celsius to speed up ethanol evaporation.
- vii. Ethanol is produced after distillation.

## 5.6 Compost

It is the oldest way of stabilising organic waste and is a natural process of rotting or breakdown of organic matter by aerobic and anaerobic bacteria. Organic material that contains humic substrate and has been composted and used as a fertilizer and soil amendment is referred to as compost [31]. It is a helpful tool for farmers who practise organic farming. In addition to N, P, and K, it also includes micronutrients like Fe, Cu, Zn, and Mn. By 2025, there would be a requirement for 10 MMT of organic and bio-fertilizer in addition to 35 MMT of chemical fertilizer, according to the Ministry of Urban Development Department of the Government of India. Only 6–7 MMT of NPK nutrients can now be produced in the nation. As a result, there will be a huge discrepancy between supply and demand. This gap can be closed by producing usable manure from the organic waste generated by all cities [32].

### 5.6.1 Benefits of Composting

- Reduce the volume of waste and the need for chemical fertilizer
- Promotes higher yield of the crop and generates additional revenue
- Kill pathogen and weed seed

- Facilitates reforestation and habitat revitalization by amending contaminated, compacted and marginal soil
- Reduce pollution
- Provide at least 50% cost savings over conventional soil, water and air pollution technologies.

### 5.7 Vermicomposting

Vermicomposting is a practical waste management method. The stabilization of waste organic matter through the cooperative activity of earthworm microorganisms has recently been developed as vermicomposting of food wastes

for the generation of bio-fertilizers. Vermicompost is compost that has been created with the aid of earthworms [33]. Earthworms eat biomass and expel it as wormcast, which is the digested form. It is a stable, fine-grained organic manure that enhances the physiochemical and biological qualities of the soil. For better vermicomposting, the material should have a moisture of 60-70%, aeration-50%, pH-6.5-7.5 and a temperature of 18-35 °C. It contains N-(1.2-1.6%), P-(1-1.2%) and K-(0.5-0.75%). When it comes to nutrient availability in soil, the finished product (vermicompost) has greater qualities than traditional compost. Its application improves mycorrhizal symbiotic relationships with the roots

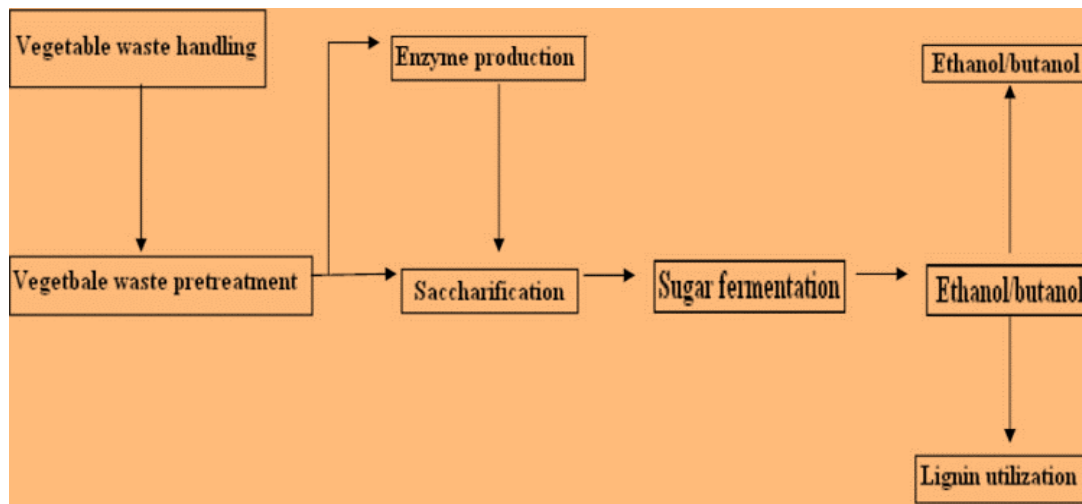


Fig. 1. Flow diagram for bioethanol/biobutanol production from vegetable wastes [20]

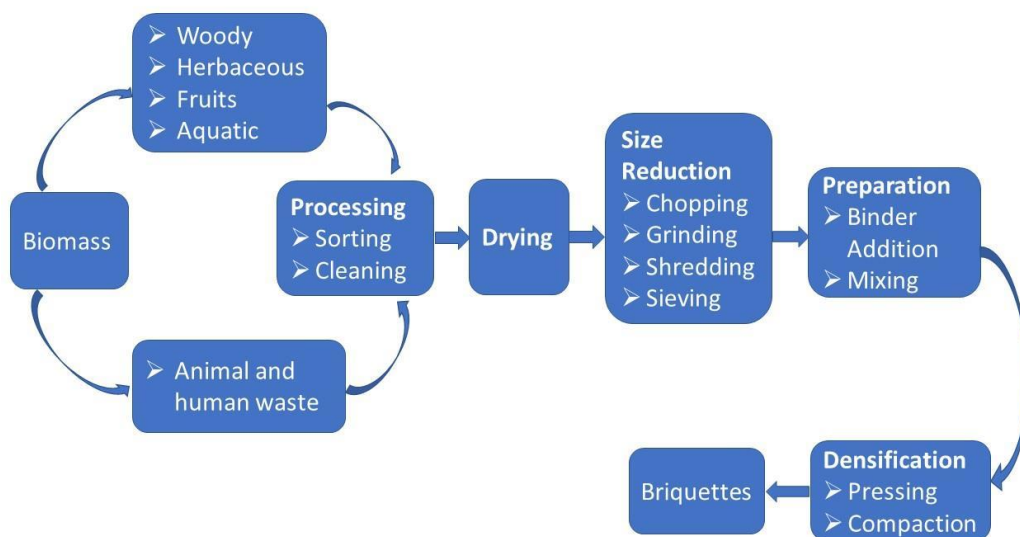


Fig. 2. Diagrammatically representation of the process of briquetting [27]

and legume nodulation. One could draw the conclusion that vermicomposting is better suited than composting for the creation of soil fertilizers since it can effectively reduce bacterial pathogenic load [34].

## 5.8 Bioactive Substances

Fruits and vegetables are the simplest forms of functional foods, due to their high content of bioactive components and non-nutrient secondary metabolites such as phenolic compounds, terpenes, fatty acids, dietary fiber, saponins and phytoestrogens. Both their structural parts (stems, leaves, peels, pulps, seeds, shells, brans and roots) and the residues remaining after the extraction of juice, oil, starch and sugar contain these compounds in large quantities [35].

### 5.8.1 Phenolic compounds

Phenolic compounds derived from vegetable waste have many uses, including food functionalization, use as natural antioxidants in the personal care and cosmetics industries, dietary supplements or nutraceuticals with health advantages, and the pharmaceutical sector. Brassica vegetables (broccoli, cabbage, cauliflower, etc.) and their by-products are the principal sources of glucosinolates and isothiocyanates, which are produced during their breakdown. These substances have been linked to the reduction of cardiovascular illnesses and their anti-cancer properties, particularly against lung, bladder, and colon cancer. Capsaicinoids are reported in pepper by-product. The main capsaicinoids present in pepper wastes are capsaicin and dihydrocapsaicin. They exhibit quite potent antiproliferative and antioxidant properties. Capsaicin has also been extensively researched for its potential to relieve neurological pain. Capsaicin has actually received FDA and EU approval as a medication for the topical management of neuropathic pain.

### 5.8.2 Dietary fibres

Vegetable waste is also an excellent feedstock for the recovery of nutritional fiber. The word "dietary fiber" refers to a complex combination of non-digestible polysaccharides, waxes, and lignin present in plant-based foods. Insoluble fibres include cellulose, hemicellulose, and lignin, whereas soluble fibers include pectins, -glucans, fructans, and arabinoxylans [36].

### 5.8.3 Advantages

Insoluble fiber improves laxation and promotes the growth of intestinal microflora, whereas soluble fiber helps to lower blood cholesterol and regulate blood glucose levels [37]. In the agri-food industry, pectin has been traditionally used as a gelling and thickening agent, and as a stabilizer of fruit juices. However, in recent years pectin has been used in innovative applications such as fat replacer agent through encapsulation or as a carrier molecule for antimicrobial and/or antioxidant compounds in edible packages. Citrus peel and sugar beet pulp are the main sources for the recovery and production of commercial pectin.

### 5.8.4 Pigments

Tomato peel has a high concentration of carotenoids, including lycopene [38]. It aids in the treatment of coronary heart disease and cancer. Carrot pomace is similarly high in carotenoids. Beetroot root peel contains excellent water-soluble nitrogenous pigments known as betalains, which are divided into two groups: red betacyanins and yellow betaxanthins. They are free radical scavengers that protect biological molecules from being oxidized by active oxygen and free radicals. In the current food sector, betalains are employed as natural colourants [39].

### 5.8.5 Food additives

Synthetic antioxidants such as butylated hydroxyanisole (BHA) and butylated hydroxytoluene (BHT) have long been employed as antioxidant additives in the food industry to protect and stabilize the freshness, nutritional value, flavour, and colour of foods. However, BHT has the potential to be hazardous, particularly at large dosages. As a result, interest in replacing synthetic dietary antioxidants with natural ones has grown in recent years. Carrot pomace may be utilized in bread cake, dressing, and pickles, as well as functional beverages [40] and onion pomace in snacks.

### 5.8.6 Methods of extraction of bioactive substances

The extraction process for these chemicals is determined by various aspects, including the technique used, the raw material, and the organic solvent. Conventional processes often require significant amounts of organic solvents, a

lot of energy, and a lot of time, which has stimulated interest in emerging technologies known as green technologies. These can help to reduce or eliminate the usage of harmful solvents, preserving the natural environment and its resources. Soxhlet, maceration, and hydro-distillation are the main conventional extraction techniques for bioactive chemicals, however green technology includes pulsed electric field, microwave-assisted extraction, high hydrostatic pressure, and solid-state fermentation. A brief explanation of the above-mentioned techniques is given below.

### 5.8.7 Soxhlet technique

In this technique, a small quantity of dry sample is placed on the equipment through which the solvent travels. The procedure is repeated until the extraction is complete. However, this approach necessitates a lengthy extraction time as well as a substantial volume of solvent [41].

### 5.8.8 Maceration

It involves chopping the sample into smaller particles in order to enhance the surface area for a desirable solvent mixture. The agitation in the maceration process facilitates extraction in two ways: it increases diffusion and removes the concentrated solution from the sample's surface. This method has long been used to extract essential oils and bioactive substances [42].

### 5.8.9 Hydro-distillation

It is used to extract the volatile fraction and is accomplished with distilled water. This process typically takes 6-8 hours and does not use organic solvents. This method employs three major physicochemical processes: hydro-diffusion, hydrolysis, and heat breakdown. High temperatures during extraction can damage chemicals, limiting their application. Hydro-distillation is a comprehensive method in which volatile and non-volatile organic molecules can be extracted and physically separated in a single stage. The volatile organic components are removed from the matrix by azeotropic distillation; they are then condensed, collected, and separated in a Florentine flask. Boiling water in contact with the matrix inside the alembic extracts the soluble non-volatile organic molecules. However, hydro-distillation requires sufficiently high levels of energy and is time-consuming [43].

### 5.8.10 Pulsed Electric Field (PEF)

The idea behind pulsed electric field extraction is to cause electroporation of the cell membrane, which increases extraction yield. An electric potential travel through the cell membrane, separating molecules based on their charge. This repulsion causes pores to develop, enhancing permeability. PEF is a useful method for economically and sustainably recovering important compounds from various fruit and vegetable tissues, owing to its capacity to soften and rupture cell membranes, enabling the release of intracellular molecules [44]. Vallverdú-Queralt *et al.*, [45] extracted bioactive compounds from tomato juice by this method by applying 5-30 pulses of the electric field with a strength of (0.4–2 kV/cm).

### 5.8.11 Microwave-Assisted Extraction (MAE)

Microwaves are electromagnetic fields with perpendicular oscillating fields, such as electric and magnetic field frequencies, that span from 300 MHz to 300 GHz. The solvent diffuses into the solid matrix and dissolves the solute to a concentration restricted by the solid's properties. Microwaves are a non-contact heat source that can provide more efficient heating by increasing energy transfer and decreasing temperature gradient. This approach can efficiently separate several kinds of chemicals, including essential oils, antioxidants, pigments, flavourings, and other organic compounds [46]. A domestic microwave oven, which can operate at a maximum input power of 850W at a frequency of 2450MHz was used by Hiranvarachat and Devahastin, [47] to extract bioactive compounds from carrot peels.

### 5.8.12 High Hydrostatic Pressure (HHP)

It evolved as an alternative to thermal methods in order to get microbiologically safe food products while avoiding undesired changes in food sensory, physicochemical, and nutritional qualities. This technique runs at pressures ranging from 100 to 1,000 MPa [48]. Strati, Gogou, & Oreopoulou, [49] extracted lycopene pigment and other volatile compounds from tomato peels by setting a pressure range of 100–800 MPa for 1–30 min. Temperature prior to pressurization was 25°C and was elevated during compression, due to adiabatic heating, approximately 3°C/100 MPa.



**Table 1. Some enzymes extracted from vegetable waste**

Enzyme	Substrate	Microorganism used	References
Amylase	Cabbage waste	<i>Pseudomonas spp.</i>	[50]
	Cassava waste	<i>Bacillus spp.</i>	[51]
	Potato peel	<i>Bacillus subtilis</i>	[52]
Cellulase	Cabbage waste	<i>Pseudomonas spp.</i>	[50]
Laccase	Potato peeling	<i>Trametes hirsute</i>	[53]
	Melon peel	<i>Trichoderma harzianum</i>	[54]
Xylanase	Watermelon rind	<i>Trichoderma spp.</i>	[55]
	Tomato waste	<i>Aspergillus awamori</i>	[56]

**Table 2. Some other products developed from vegetable waste**

Product	Substrate	Microorganism used	References
Isoamyl acetate	Carrot pomace	<i>Ceratocystis fimbriata</i>	[57]
Vanillin	Carrot pomace	<i>Pycnoporus cinnabarius</i>	[6]
Vanillin	Sugar beet pulp	<i>Aspergillus niger</i>	[6]
Organic acids			
Citric acid	Cassava bagasse	<i>Aspergillus niger</i>	[58]
Lactic acid	Green pea and potato peel	<i>Lactobacillus plantarum</i>	[59]

### 5.8.13 Solid-State Fermentation (SSF)

Fermentation using different microorganisms is another technique for the extraction of various enzymes and bioactive compounds. Among existing technologies in the fermentation industry, solid-state fermentation (SSF) shows many advantages over fermentation in submerged culture, such as lower cost and much lower reactor volumes. Additionally, this cultivation technique permits the use of different agricultural and agro-industrial residues as substrates. Different enzymes and some other products extracted from vegetable waste are given in the table.

### 5.9 Exopolysaccharides

These are biopolymers synthesized extracellularly or secreted into the extracellular medium by the microorganism during its growth. Their synthesis is generally favoured by the presence of a carbon source in excess, associated with limitation by another nutrient (e.g., nitrogen or oxygen) [60]. Depending on their structure and composition, they can be divided into two groups: homopolysaccharides and heteropolysaccharides. Homopolysaccharides consist of identical monosaccharide units (D-glucose or D-fructose) and can also be divided into two major groups: Glucans and fructans. Heteropolysaccharides are formed mainly by

glucose, galactose and rhamnose, in different ratios [61]. However, their production becomes quite expensive since the preferred substrates in the industrial production of these biopolymers are glucose and sucrose. The utilization of fruit and vegetable waste as a carbon source is an interesting alternative to reduce the production costs of microbial exopolysaccharides. The optimization of the cultivation conditions (temperature, pH, aeration, micronutrients, etc.) and selection of the different strains responsible to produce these polysaccharides and adequate downstream processing, such as the separation processes are very demanding to improve the exopolysaccharide yields and quality [62].

Xanthan was the first biopolymer to be approved by the Food and Drug Authority (FDA) as a food additive in 1969 and since then, the demand for xanthan gum produced from *Xanthomonas campestris* has progressively increased, at an annual rate of 5–10% [63]. It is used as gelling, thickener, stabilizer and suspending agent in creams, fruit juices, and sauces, as well as in syrups, ice cream and dessert coverings. It is also used in oil drilling, pharmaceutical products, cosmetics, paints (ceramic glazes), textile printing, pastes and slurries, explosive formulations, rust removers and agricultural products (as stabilizing agent for herbicides, pesticides and fertilizers).

Pullulan is another interesting biodegradable exopolysaccharide obtained from the fermentation medium of yeasts like fungus *Aureobasidium pullulans* [64]. In the food industry, pullulan is used in food coatings and can be molded in edible, biodegradable and oxygen-impermeable films. Pullulan also has medical and pharmaceutical applications such as drug delivery, gene delivery, plasma expander, tissue engineering, wound healing, vaccinations and capsule coating [65].

### 5.10 Bioplastic

Bio-plastic refers to polymers manufactured from renewable biomass sources such as maize starch, potato starch, cassava starch, vegetable oil, and so on. Bio-plastics are plastic materials that are either bio-based, biodegradable, or have both qualities. Biodegradable medical implants, computer and mobile phone casings, foil, moulds, tins, cups, bottles, and packaging devices are only a few of the uses. There are no substantial disparities in the cost scales since the rapidly growing price of crude oil will compensate for the variances in production costs in the future.

#### 5.10.1 Advantages of bioplastic

- i. Reduced use of fossil fuel resources
- ii Environmentally friendly
- iii. Biodegradable
- iv. Recycled
- v. Non-toxic

#### 5.10.2 Types of bioplastic

##### 5.10.2.1 Starch-based polymers

Account for almost half of the bioplastics industry, with thermoplastic starch being the most extensively used bioplastic. As pure starch absorbs humidity, flexibiliser and plasticizers such as sorbitol and glycerine are added so that the starch may also be treated thermoplastically.

##### 5.10.2.2 Cellulose bioplastics

Plastics derived from cellulose are primarily composed of cellulose esters (cellulose acetate and nitrocellulose) and their derivatives, such as celluloid. These types of cellulose can be found in plant materials such as forestry leftovers and agricultural by-products.

##### 5.10.2.3 The aliphatic polyester plastics

Polyhydroxyalkanoates (PHA), poly-3-hydroxybutyrate (PHB), and polylactic acid

bioplastic (PLA) are the most. Sugarcane and sugar beetroot are used as feedstock. Bioplastic now accounts for roughly 1% of overall output out of 368 million tonnes of total plastic; however, the bioplastic industry is expanding rapidly and will reach 4.7 million tonnes by 2025.

## 6. CHALLENGES IN VEGETABLE WASTE MANAGEMENT

The Ministry of Environment, Forests, and Climate Change oversees waste management in India. However, most urban local governments lack suitable action plans for implementation. Unfortunately, no city in India can claim to have 100% trash segregation at dwelling units, and on average, only 70% of garbage is collected, with the other 30% being mixed up and lost in the urban environment. Only 12.45% of total garbage collected is scientifically handled, with the remainder disposed of in open landfills [66]. An efficient waste management system must be environmentally friendly, cost-effective, and acceptable to the local population. The following are the major waste management challenges: -

- ❖ Absence of segregation and characterization of waste at the source
- ❖ Dearth of awareness
- ❖ Lack of technical expertise and appropriate institutional arrangement
- ❖ Lack of public involvement in waste management and sanitary conditions
- ❖ Indifferent attitude of citizens toward waste management
- ❖ Lack of Regulation at ground level
- ❖ Lack of funds for processing

## 7. CONCLUSION

In today's world, waste management is the most serious issue. Due to the worldwide increase of food production, there has recently been significant societal and environmental demand for the effective use of vegetable and fruit waste. The massive waste of food is caused by a lack of oversight over such agri-economy practices. Converting vegetable wastes into bioenergy and by-products can produce cash from food processing waste. Vegetable wastes are abundant in vitamins and minerals, making them ideal raw materials to produce high-value compounds or metabolites. So, the strategies stated above are some of the productive approaches for using and managing vegetable waste in industrial and residential settings.

## COMPETING INTERESTS

Authors have declared that no competing interests exist.

## REFERENCES

1. Anonymous food and agriculture organization of United Nation. FAOSTAT statistical database. Rome; 2021.
2. Negi S, Anand N. Factors leading to losses and wastage in the supply chain of fruits and vegetables sector in India. *Energy, Infrastructure and Transportation Challenges and Way Forward*. 2016;1:80-105.
3. Chang JI, Tsai JJ, Wu KH. Composting of vegetable waste. *Waste Management & Research: The Journal of the International Solid Wastes and Public Cleansing Association*. 2006;24(4):354-362.
4. Lin J, Zuo J, Gan L, Li P, Liu F, Wang K. Effects of mixture ratio on anaerobic co-digestion with fruit and vegetable waste and food waste of China. *Journal of Environmental Sciences*. 2011;23(8):1403-1408.
5. Zhang R, El-Mashad HM, Hartman K, Wang F, Liu G, Choate C. Characterization of food waste as feedstock for anaerobic digestion. *Bioresource Technology*. 2007;98(4):929-935.
6. Laufenberg G, Kunz B, Nystroem M. Transformation of vegetable waste into value added products. *Bioresource Technology*. 2003;87:167-198.
7. Plazzotta S, Manzocco L, Nicoli MC. Fruit and vegetable waste management and the challenge of fresh-cut salad. *Trends in Food Science & Technology*. 2017;63:51-59.
8. Segre A, Falasconi L. *Il libro nero dello spreco in italia: Il cibo*. Milan: Ambiente Edizioni; 2011.
9. Demirbas, A. Waste management, waste resource facilities and waste conversion processes. *Energy Conversion and Management*. 2011;52(2):1280-1287.
10. Manzocco L, Alongi M, Sillani S, Nicoli MC. Technological and consumer strategies to tackle food wasting. *Food Engineering Reviews*. 2016;8(4):457-467.
11. Williams PJ, Anderson PA. Technical bulletin: Operational cost savings in dairy plant water usage. *International Journal of Dairy Technology*. 2006;59(2):147-154.
12. Kothari R, Tyagi VV, Pathak A. Waste-to-energy: A way from renewable energy sources to sustainable development. *Renewable and Sustainable Energy Reviews*. 2010;4(9):3164-3170.
13. Galanakis CM. Recovery of high added-value components from food wastes: Conventional, emerging technologies and commercialized applications. *Trends in Food Science and Technology*. 2012;26(2):68-87.
14. San Martin D, Ramos S, Zufía J. Valorisation of food waste to produce new raw materials for animal feed. *Food Chemistry*. 2016;198:68-74.
15. Clemente R, Pardo T, Madej on P, Madejon E, Bernal MP. Food byproducts as amendments in trace elements contaminated soils. *Food Research International*. 2015;73:176-189.
16. Ravi Kiran G, Suresh KP, Sampath KT, Giridhar K, Anandan S. Modeling and forecasting livestock and fish feed resources: Requirements and availability in India. *National Institute of Animal Nutrition and Physiology, Bangalore*; 2012.
17. Bakshi MPS, Wadhwa M, Makkar HP. Waste to worth: Vegetable wastes as animal feed. *CAB Reviews. Perspectives in Agriculture Veterinary Science Nutrition and Natural Resources*. 2016;11(12): 1–26.
18. Lee HS, Vermaas WF, Rittmann BE. Biological hydrogen production: Prospects and challenges. *Trends in Biotechnology*. 2010;28(5):262-271.
19. Jarungrumlert T, Prommuak C, Putmai N, Pavaasant P. Scaling-up bio-hydrogen production from food waste: Feasibilities and challenges. *International Journal of Hydrogen Energy*. 2018;43(2):634-648.
20. Singh A, Kuila A, Adak S, Bishai M, Banerjee R. Utilization of vegetable wastes for bioenergy generation. *Agricultural Research*. 2012;1:213-222.
21. Yang L, Ge X, Wan C, Yu F, Li Y. Progress and perspectives in converting biogas to transportation fuels. *Renewable and Sustainable Energy Reviews*. 2014;40:1133-1152.
22. Veeken A, Kalyuzhnyi S, Scharff H, Hamelers B. Effect of pH and VFA on hydrolysis of organic solid waste. *Journal of Dairy Technology*. 2006;59(2):147-154.

- of Environmental Engineering, ASCE. 2000;126:1076-1081.
23. Christ O, Wilderer PA, Angerhofer R. Mathematical modeling of the hydrolysis of anaerobic processes. *Water Science & Technology*. 2000; 41(3):61-65.
  24. Gunaseelan VN. Regression models of ultimate methane yields of fruits and vegetable solid wastes, sorghum and napiergrass on chemical composition. *Bioresource Technology*. 2007;98(6):1270-1277.
  25. Navarro-Puyuelo A, Reyero I, Moral A, Bimbela F, Bañares MA, Gandía LM. Effect of oxygen addition, reaction temperature and thermal treatments on syngas production from biogas combined reforming using Rh/alumina catalysts. *Journal of Industrial and Engineering Chemistry*. 2019;80:217-226.
  26. Srivastava NSL, Narnaware SL, Makwana JP, Singh SN, Vahora S. Investigating the energy use of vegetable market waste by briquetting. *Renewable Energy*. 2014;68: 270-275.
  27. Kpalo SY, Zainuddin MF, Manaf LA, Roslan AM. A review of technical and economic aspects of biomass briquetting. *Sustainability*. 2020;12(11): 4609-4639.
  28. Lin Y, Tanaka S. Ethanol fermentation from biomass resources: Current state and prospects. *Applied Microbiology and Biotechnology*. 2006;69:627-642.
  29. Arapoglou D, Varzakas T, Vlyssides A, Israilides CJWM. Ethanol production from potato peel waste (PPW). *Waste Management*. 2010;30(10):1898-1902.
  30. Sanchez OJ, Cardona CA. Trends in biotechnological production of fuel ethanol from different feedstocks. *Bioresource technology*. 2008;99(13):5270-5295.
  31. Choi IS, Cho EJ, Moon JH, Bae HJ. Onion skin waste as a valorization resource for the by-product's quercetin and biosugar. *Food Chemistry*. 2015;188:537- 542.
  32. Roy RLB, Al Rejah R, Baruah K, Saikia R, Dey S. Decentralized composting of vegetable market waste through pit composting: An alternative for urban city waste. *International Journal of Environmental Science and Development*. 2017;8(4):295-298.
  33. Rorat A, Vandenbulcke F. Earthworms converting domestic and food industry wastes into biofertilizer. *Industrial and Municipal Sludge, Butterworth-Heinemann*. 2019;1:83-106.
  34. Soobhany N. Preliminary evaluation of pathogenic bacteria loading on organic municipal Solid waste compost and vermicompost. *Journal of Environmental Management*. 2018;206:763-767.
  35. Esparza I, Jiménez-Moreno N, Bimbela F, Ancín-Azpilicueta C, Gandía LM. Fruit and vegetable waste management: Conventional and emerging approaches. *Journal of Environmental Management*. 2020;265:110-510.
  36. Nawirska A, Kwasniewska M. Dietary fibre fractions from fruit and vegetable processing waste. *Food Chemistry*. 2005; 91(2):221-225.
  37. Tosh SM, Yada S. Dietary fibers in pulse seeds and fractions: Characterization, functional attributes, and applications. *Food Research International*. 2010;43(2): 450-460.
  38. Knoblich M, Anderson B, Latshaw D. Analysis of tomato peel and seed byproduct and their use as a source of carotenoids. *Journal of the Science of Food and Agriculture*. 2005;85:166–1170.
  39. Azeredo HM. Betalains: Properties, sources, applications, and stability – A review. *International Journal Food Science and Technology*. 2009;44:2365–2376.
  40. Omre PK, Shikhangi Singh S. Waste utilization of fruits and vegetables-A review. *South Asian Journal of Food Technology and Environment*. 2018;4(1): 605-615.
  41. Heleno SA, Diz P, Prieto MA, Barros L, Rodrigues A, Barreiro MF, Ferreira IC. Optimization of ultrasound-assisted extraction to obtain mycosterols from *Agaricus bisporus* L. by response surface methodology and comparison with conventional Soxhlet extraction. *Food Chemistry*. 2016;197:1054–1063.
  42. Azmir J, Zaidul ISM, Rahman MM, Sharif KM, Mohamed A, Sahena F, Omar AKM. Techniques for extraction of bioactive compounds from plant materials: A review. *Journal of Food Engineering*. 2013;117(4):426–436.
  43. Petigny L, Périno S, Minuti M, Visinoni F, Wajsman J, Chemat F. Simultaneous microwave extraction and separation of volatile and non-volatile organic compounds of boldo leaves. From lab to industrial scale. *International Journal of Molecular Sciences*. 2014;15(5):7183–7198.

44. Roselló-Soto E, Koubaa M, Moubarik A, Lopes RP, Saraiva JA, Boussetta N, Barba FJ. Emerging opportunities for the effective valorization of wastes and by-products generated during olive oil production process: Non-conventional methods for the recovery of high-added value compounds. *Trends in Food Science & Technology*. 2015;45(2):296–310.
45. Vallverdú-Queralt A, Odriozola-Serrano I, Oms-Oliu G, Lamuela Raventós RM, Elez-Martínez P, Martín-Belloso O. Impact of high-intensity pulsed electric fields on carotenoids profile of tomato juice made of moderate-intensity pulsed electric field treated tomatoes. *Food Chemistry*. 2013; 141(3):3131–3138.
46. Li Y, Fabiano-Tixier AS, Vian MA, Chemat F. Solvent-free microwave extraction of bioactive compounds provides a tool for green analytical chemistry. *Trends in Analytical Chemistry*. 2013;47:1–11.
47. Hiranvarachat B, Devahastin S. Enhancement of microwave-assisted extraction via intermittent radiation: Extraction of carotenoids from carrot peels. *Journal of Food Engineering*. 2014; 126:17–26.
48. Briones-Labarca V, Plaza-Morales M, Giovagnoli-Vicuña C, Jamett F. High hydrostatic pressure and ultrasound extractions of antioxidant compounds, sulforaphane and fatty acids from Chilean papaya (*Vasconcellea pubescens*) seeds: Effects of extraction conditions and methods. *Food Science and Technology*. 2015;60(1):525–534.
49. Strati IF, Gogou E, Oreopoulou V. Enzyme and high pressure assisted extraction of carotenoids from tomato waste. *Food and Bioproducts Processing*. 2015;94:668–674.
50. Kunamneni A, Kumar KS, Singh S. Response surface methodological approach to optimize the nutritional parameters for enhanced production of amylase in solid state fermentation by *Thermomyces lanuginosus*. *African Journal of Biotechnology*. 2005;4(7):708–716.
51. Selvam K, Selvankumar T, Rajiniganth R, Srinivasan P, Sudhakar C, Senthilkumar B, Govarthanam M. Enhanced production of amylase from *Bacillus* sp. using groundnut shell and cassava waste as a substrate under process optimization: waste to wealth approach. *Biocatalysis and Agricultural Biotechnology*. 2016;7: 250-256.
52. Mushtaq Q, Irfan M, Tabssum F, Iqbal Qazi J. Potato peels: A potential food waste for amylase production. *Journal of Food Process Engineering*. 2017;40(4): 12512-12520.
53. Sagar NA, Pareek S, Sharma S, Yahia EM, Lobo MG. Fruit and vegetable waste: Bioactive compounds, their extraction, and possible utilization. *Comprehensive Reviews in Food Science and Food Safety*. 2018;17(3):512-531.
54. Seyis I, Aksoz N. Xylanase production from *Trichoderma harzianum* 1073 D3 with alternative carbon and nitrogen sources. *Food Technology and Biotechnology*. 2005;43(1):37-40.
55. Mohamed SA, Al-Malki AL, Khan JA, Kabli SA, Al-Garni SM. Solid state production of polygalacturonase and xylanase by *Trichoderma species* using cantaloupe and watermelon rinds. *Journal of Microbiology*. 2013;51: 605-611.
56. Umsza-Guez MA, Díaz AB, Ory ID, Blandino A, Gomes E, Caro I. Xylanase production by *Aspergillus awamori* under solid state fermentation conditions on tomato pomace. *Brazilian Journal of Microbiology*. 2011;42:1585-1597.
57. Ain HBU, Saeed F, Barrow CJ, Dunshea FR, Suleria HAR. Food processing waste: A potential source for bioactive compounds. *Bioactive compounds in underutilized Fruits and Nuts*. 2020;625-649.
58. Vandenberghe LP, Socol CR, Pandey A, Lebeault JM. Solid-state fermentation for the synthesis of citric acid by *Aspergillus niger*. *Bioresource Technology*. 2000; 74(2):175-178.
59. Panda SK, Mishra SS, Kayitesi E, Ray RC. Microbial-processing of fruit and vegetable wastes for production of vital enzymes and organic acids: Biotechnology and scopes. *Environmental research*. 2016;146:161-172.
60. Chawla PR, Bajaj IB, Survase SA, Singhal RS. Microbial cellulose: Fermentative production and applications. *Food Technology & Biotechnology*. 2009;47(2): 107-124.
61. De Vuyst L, De Vin F, Vaningelgem F, Degeest B. Recent developments in the biosynthesis and applications of

- heteropolysaccharides from lactic acid bacteria. International Dairy Journal. 2001; 11(9):687-707.
62. Torres CA, Marques R, Antunes S, Alves VD, Sousa I, Ramos AM, Reis MA. Kinetics of production and characterization of the fucose-containing exopolysaccharide from Enterobacter A47. Journal of Biotechnology. 2011; 156(4):261-267.
63. Lopes BDM, Lessa VL, Silva BM, La Cerda LG. Xanthan gum: Properties, production conditions, quality and economic perspective. Journal of Food Nutrition and Research. 2015;54(3):185-194.
64. Prajapati VD, Jani GK, Khanda SM. Pullulan: An exopolysaccharide and its various applications. Carbohydrate Polymers. 2013;95(1):540-549.
65. Singh RS, Kaur N, Rana V, Kennedy JF. Recent insights on applications of pullulan in tissue engineering. Carbohydrate Polymers. 2015;153:455-462.
66. Joshi R, Ahmed S. Status and challenges of municipal solid waste management in India: A review. Cogent Environmental Science. 2016;2(1):1-18.

---

© 2023 Yadav et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

*Peer-review history:*

*The peer review history for this paper can be accessed here:*  
<https://www.sdiarticle5.com/review-history/102821>